



## Free Standing Cooker

HKT8237P



### FEATURES

- Keramisk kokeplate
- Pyrolyse
- Antal funktioner: 15
- Kapacitet ovnrum: 72 L
- Energiklasse: A

#### Teleskob udtræksskinner i 1 niveau

Bagepladerne og bradepanderne kan trækkes helt ud uden risiko for at tabe maden på gulvet.



#### Pyrolyse

Pyrolyseovnen sparer dig for den tid, du ellers skal bruge på at skrubbe indersiden af ovnen. Det 120 min. lange pyrolyseprogram brænder fastbrændte madrester til aske ved en temperatur på intet mindre end 480 grader. Derefter kan du nemt tørre asken væk med en fugtig klud uden brug af rengøringsmidler. Er ovnen kun let snavset, kan du bruge øko-programmet på kun 90 minutter, hvorved du sparer 25% af energiforbruget.

#### 3D Cooking

3d madlavninger, også kaldet multidimensional madlavning, er den nyeste generation af professionel madlavningsteknologi. Her aktiveres alle varmelegemer i toppen, bunden og omkring blæseren, hvorved der opnås den bedst mulige og mest ensartede varmefordeling. Denne funktion giver et perfekt resultat på store stykker kød som f.eks. en hel kalkun eller store stege.

GENERAL	
Type	Free-Standing
Capacity Oven	72 L
Color	White
Oven Type	Multifunctional Cooking
Hob Type	Electric (Vitreoceramic)
BURNERPLATE	
Rear Left	Ø160 mm - 1500W (H)
Front Left	Ø210/120 mm - 750/2200 W (Duo)
Rear Right	Ø180 mm - 1800W (H)
Front Right	Ø140 mm - 1200 W (H)
Burner Plate Surface	Glass
OVEN FUNCTIONS	
Number of Cooking Functions	15 functions
Metal Handle	White
Soft Open / Soft Close Door	No
Meat Probe	No
Number of glasses in door	3
Light in Oven Cavity	1 x Round Halogen light (Rear)
Doorlock	Mechanical Lock
Display	LED Display - Touchcontrol
Display Brightness Adjustment	No
Pop-In Pop-Out Knobs (PIPO)	Yes
Knob Color	Black with metal capping
Display Lock	Yes
Steam Cleaning	Simple steam cleaning
Pyrolytic Cleaning	Yes
Cooling Fan	Yes
Booster	Yes
OVEN CAVITY AND ACCESSORIES	
Catalytic Back Wall	No
Removable Sideracks	5 levels
Telescopic Rails	1 Level (Full Extention)
Deep Tray	1
Standard Tray	2
Wireshef	1
TECHNICAL INFORMATION	
Energy Efficiency Class	A
Dimensions (WxDxH)	60 x 60 x 90 cm
Niche Dimensions Cabinet (WxDxH)	NA
Niche Dimensions Undercounter (WxDxH)	NA
Cabel	Standard
Cabel lenght	1,2 m
Cabel placement	Rear
Plug type	None
Voltage/Frequency Oven	220-240 V~;50 Hz

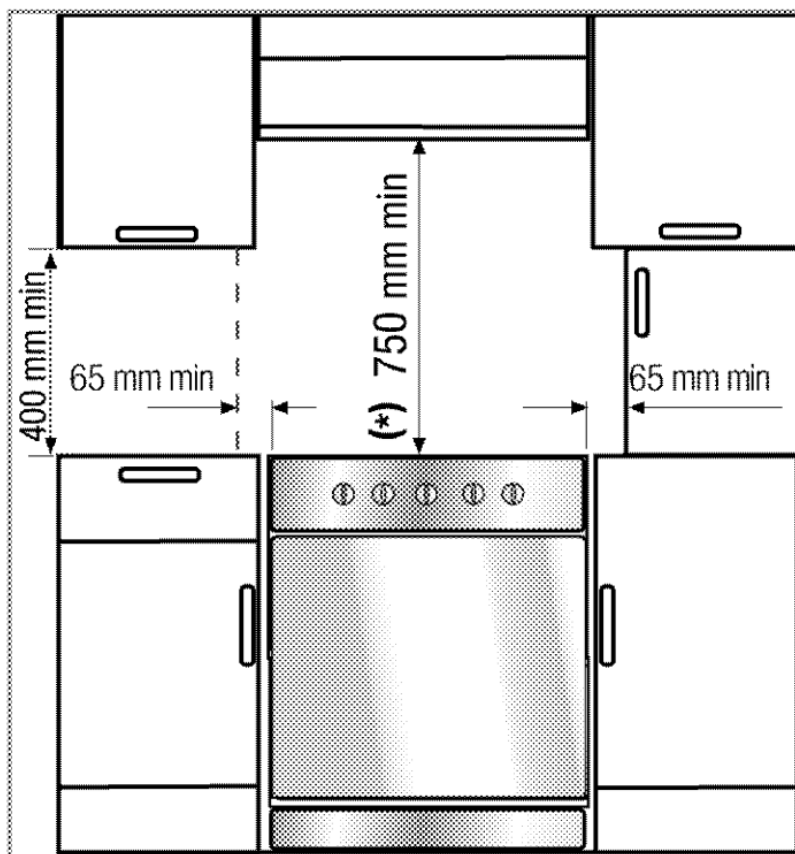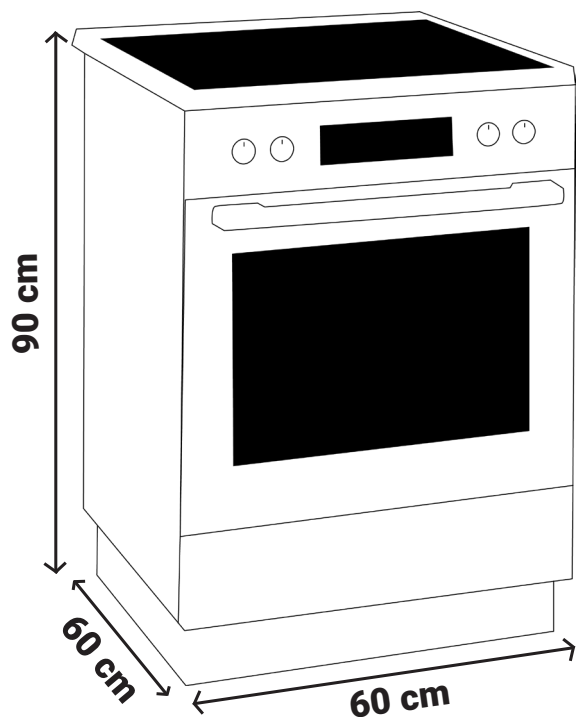

- To ensure that critical air openings are maintained under the product, we recommend that this product is mounted on a solid base and that the feet do not sink into a carpet or soft floor covering. The kitchen floor must be able to support the weight of the unit plus the additional weight of pots, pans, and the food being cooked.
- This product is a Class 1 appliance according to the EN 30-1-1 standard, i.e. it can be placed with its back end and one side to the kitchen walls, kitchen fixtures or equipment of any size. Kitchen furniture or equipment on the other side can only be the same size or smaller.
- The product can be placed with cabinets on both sides, but there must be a minimum distance of 400 mm above the stove and a side clearance of 65 mm between the appliance and all walls, parts or tall cabinets.
- The appliance can also be freestanding. In this case, leave a minimum distance of 750 mm above the surface of the stove.  
If a kitchen fan is to be installed above the appliance, the height of the hood should be at least 650 mm, unless otherwise stated.